

Printview: 2-conductor center module; codable; can be commoned with adjacent jumpers and staggered jumpers; 1-pole - Item No.: 769-505

**2-conductor center module; codable; can be commoned with adjacent jumpers and staggered jumpers; 1-pole**

Item No.: 769-505



2-conductor center module; codable; can be commoned with adjacent jumpers and staggered jumpers; 1-pole

**Marking**

RoHS ✓  
Compliant

**Business data**

Supplier	WAGO
Item no.	769-505
GTIN / EAN	4017332331456
Content	1
Order amount	250
Customer item number	

**Notes**

According to EN 61984, connectors without current interrupting capacity shall not be mated and unmated when live or under load.

**Technical data**

*Miscellaneous*

No. of Poles	1
Total number of connection points	2
Total number of potentials	1
Color	gray
Pollution degree (1)	3
Rated voltage EN (1) [V]	500 [V]
Rated surge voltage (1) [kV]	6 [kV]
Nominal current [A]	32 [A]


Printview: 2-conductor center module; codable; can be commoned with adjacent jumpers and staggered jumpers; 1-pole - Item No.: 769-505

<b>Technical data</b>	
<i>Connection technology (1)</i>	<i>CAGE CLAMP®</i>
<i>Nominal cross section 1</i>	<i>4 mm<sup>2</sup></i>
<i>Solid sizes 1</i>	<i>0.08 ... 4 mm<sup>2</sup> / 28 ... 12 AWG</i>
<i>Fine-stranded wires 1</i>	<i>0.08 ... 4 mm<sup>2</sup> / 28 ... 12 AWG</i>
<i>Strip length 1</i>	<i>8 ... 9 mm / 0.31 ... 0.35 in</i>
<i>Type of wiring</i>	<i>Front-entry wiring</i>
<i>Marking level</i>	<i>Side marking</i>
<i>Insulating material</i>	<i>PA 6.6 V0</i>
<i>Fire load [MJ]</i>	<i>0.085 [MJ]</i>
<i>Weight [g]</i>	<i>5.037 [g]</i>
<i>Width</i>	<i>5 mm / 0.197 in</i>
<i>Height</i>	<i>45.2 mm / 1.78 in</i>
<i>Length</i>	<i>35.9 mm / 1.413 in</i>
<i>Module width [mm]</i>	<i>5 [mm]</i>
<i>Module width [inch] [inch]</i>	<i>0.197 [inch]</i>

Printview: 2-conductor center module; codable; can be commoned with adjacent jumpers and staggered jumpers; 1-pole - Item No.: 769-505

---

Images & drawings

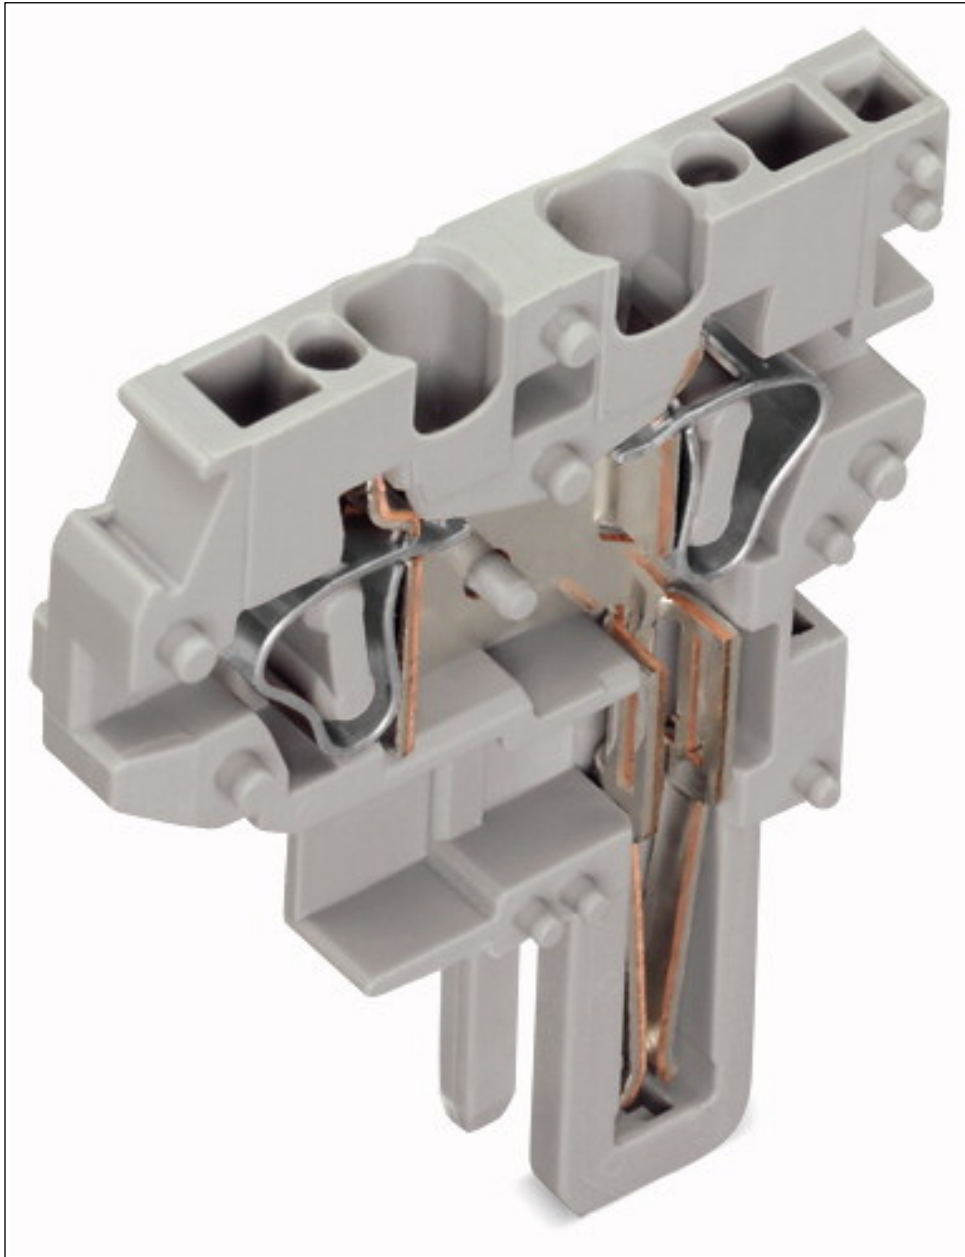

**Address**

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.