

Printview: 2-conductor end module; codable; can be commoned with adjacent jumpers and staggered jumpers; 1-pole - Item No.: 769-506

2-conductor end module; codable; can be commoned with adjacent jumpers and staggered jumpers; 1-pole

Item No.: 769-506



2-conductor end module; codable; can be commoned with adjacent jumpers and staggered jumpers; 1-pole

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	769-506
GTIN / EAN	4017332331463
Content	1
Order amount	250
Customer item number	

Notes

According to EN 61984, connectors without current interrupting capacity shall not be mated and unmated when live or under load.

Technical data

Miscellaneous


No. of Poles	1
Total number of connection points	2
Total number of potentials	1
Color	gray
Pollution degree (1)	3
Rated voltage EN (1) [V]	500 [V]
Rated surge voltage (1) [kV]	6 [kV]
Nominal current [A]	32 [A]

Printview: 2-conductor end module; codable; can be commoned with adjacent jumpers and staggered jumpers; 1-pole - Item No.: 769-506


Technical data	
<i>Connection technology (1)</i>	<i>CAGE CLAMP®</i>
<i>Nominal cross section 1</i>	<i>4 mm²</i>
<i>Solid sizes 1</i>	<i>0.08 ... 4 mm² / 28 ... 12 AWG</i>
<i>Fine-stranded wires 1</i>	<i>0.08 ... 4 mm² / 28 ... 12 AWG</i>
<i>Strip length 1</i>	<i>8 ... 9 mm / 0.31 ... 0.35 in</i>
<i>Type of wiring</i>	<i>Front-entry wiring</i>
<i>Marking level</i>	<i>Side marking</i>
<i>Insulating material</i>	<i>PA 6.6 V0</i>
<i>Fire load [MJ]</i>	<i>0.07 [MJ]</i>
<i>Weight [g]</i>	<i>4.517 [g]</i>
<i>Width</i>	<i>5 mm / 0.197 in</i>
<i>Height</i>	<i>45.2 mm / 1.78 in</i>
<i>Length</i>	<i>35.9 mm / 1.413 in</i>
<i>Module width [mm]</i>	<i>5 [mm]</i>
<i>Module width [inch] [inch]</i>	<i>0.197 [inch]</i>

Printview: 2-conductor end module; codable; can be commoned with adjacent jumpers and staggered jumpers; 1-pole - Item No.: 769-506

Images & drawings

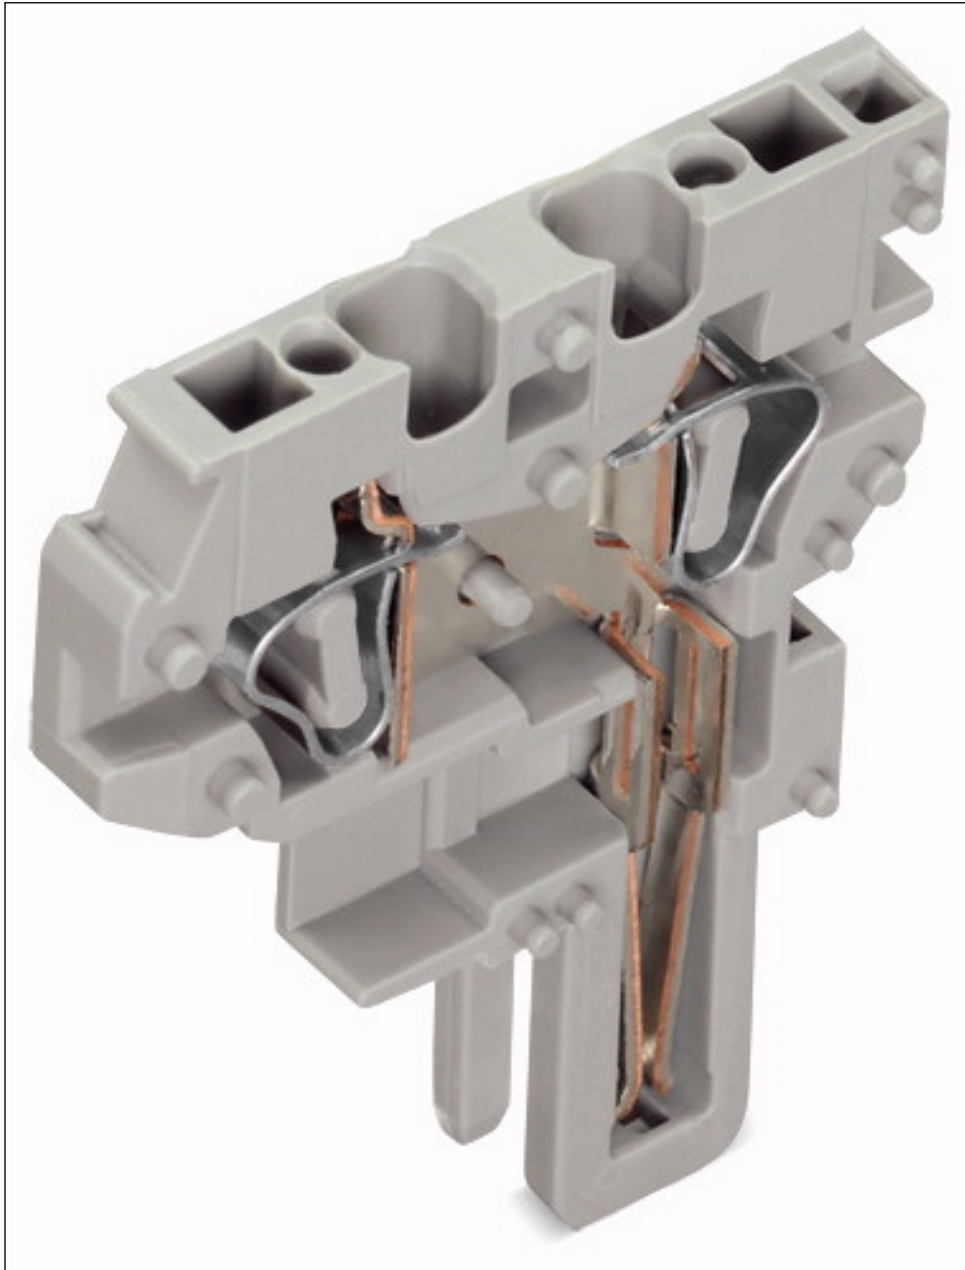

Printview: 2-conductor end module; codable; can be commoned with adjacent jumpers and staggered jumpers; 1-pole - Item No.: 769-506

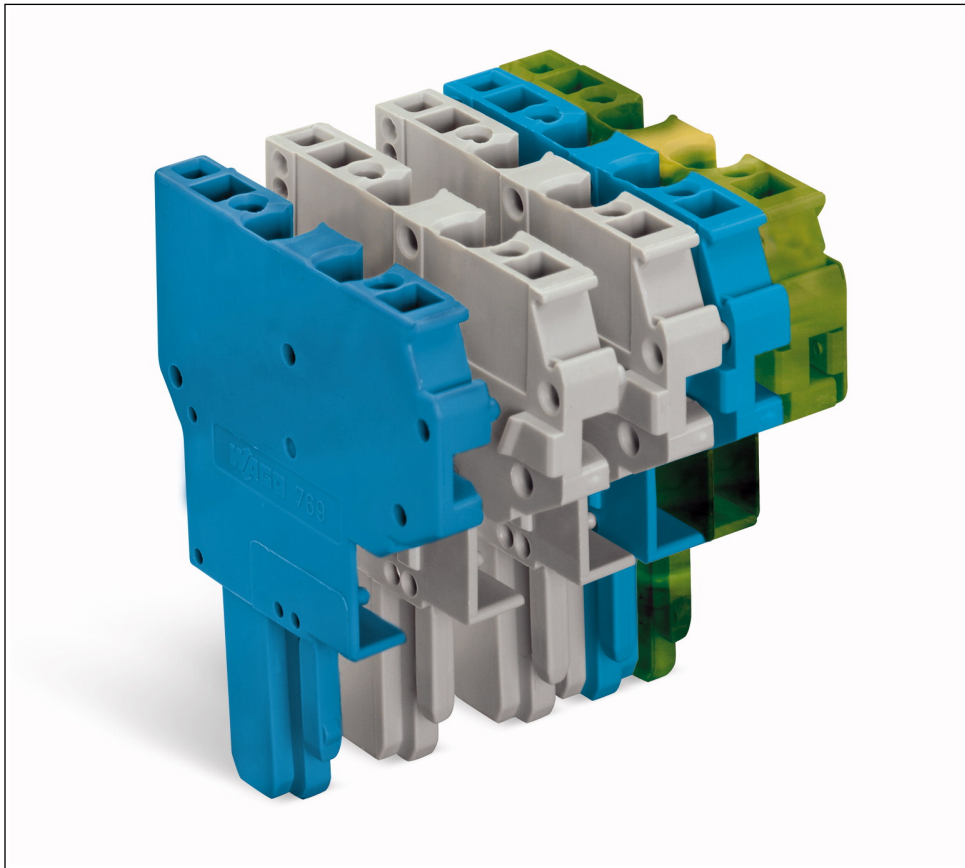

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.